


Glydea™ ULTRA 60e RTS

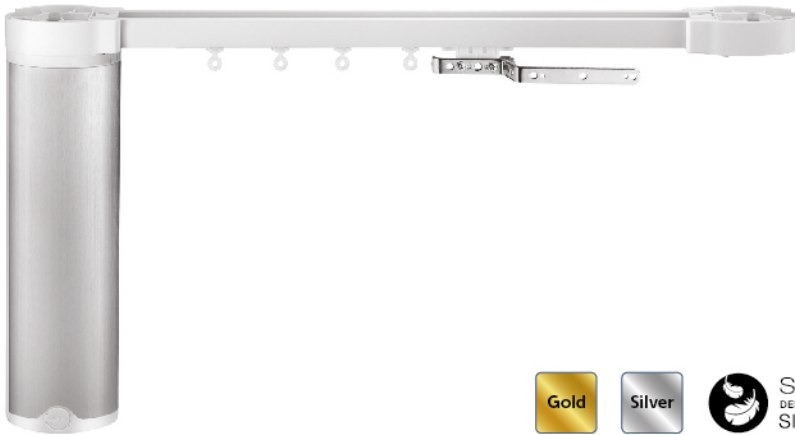

Somfy
DESIGNED FOR
SILENCE

Somfy +

Ultra quiet and adaptable features on Glydea range


Recommended to use with
Ultra quiet accessories

Glydea™ motor with 60Kg capacity for up to 12m straight track. Radio Control capability, equipped with a 1.5m three-wire EU cable + RTS receiver.


Compatible end-products




Classic curtain



Pinch pleated



Ripple fold



Accordion fold

Main functionalities



Designed for silence
🔇🔇🔇🔇🔇



Touch Motion
Open and close the curtain simply by pulling on the fabric.



Back release
Relax the fabric.



Module Compatibility



Manual operation possible in case of power failure




Adjustable speed
Up to 20 cm/s.




Soft start and Soft stop

Dimensions and Wiring


Motor length (L1)	348 mm
Motor length (L2)	328 mm

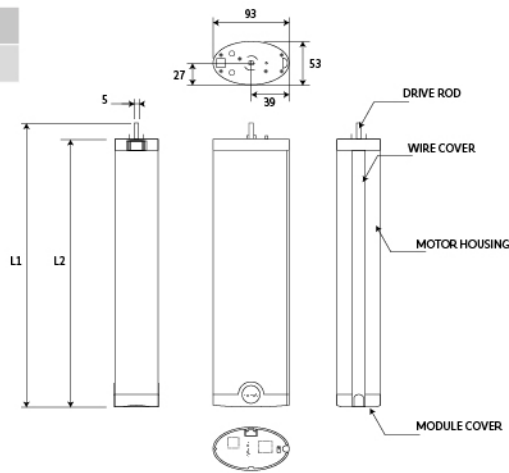

Main 90 to 255 VAC 47 to 63 Hz

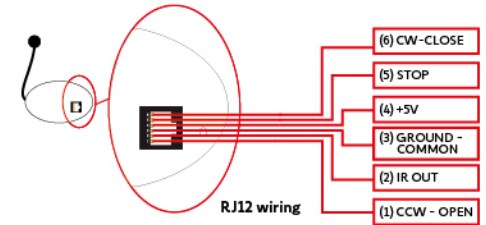

90-255 V

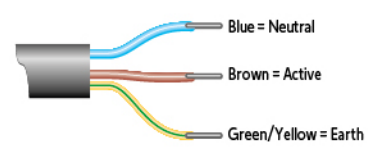

Wired Curtain

Glydea™ ULTRA 60e RTS



Technical features

Working temperature	0°C to +60°C 85%HR at +35°C (+32°F to +140°F 85%HR at +95°F)
Storage temperature	-30°C to +80°C 85%HR at +35°C (-22°F to +176°F 85%HR at +95°F)
Type of limit	Adjustable limits
Index protection rating	IP 30
Approx. net weight of the motor	1320 g
Voltage range	90 to 255 Vac
Frequency range	47 to 63 Hz
Maximum current	0.8 at 120VAC, 0.4 at 240Vac
Number of power cable wire	3
Insulation class	Class I
Maximum running time	2min 30s
Antenna	Integrated

Performances

Curtain maximum weight	60 Kg
Track maximum length	12 m
Nominal torque	1.0 Nm
Speed	20/17.5/15/12.5/7.5 (silent mode) cm/s
Noise level	45.2 / 43.4 / 37.3 / 39.7 / 29.8 dB (A)
Control method	2 or 3 normal open Dry Contact
Radio protocol	Somfy RTS protocol
Radio frequency	433MHz, 426MHz, 447MHz
Radio range	200m in open field
Number of RTS transmitter	12 maximum

Certifications

